




Koch Filter Corporation
Filtration Products Crafted with Pride

Multi-Pleat™ HT

MERV 8 Pleated Panel Air Filters for High Temperature Applications

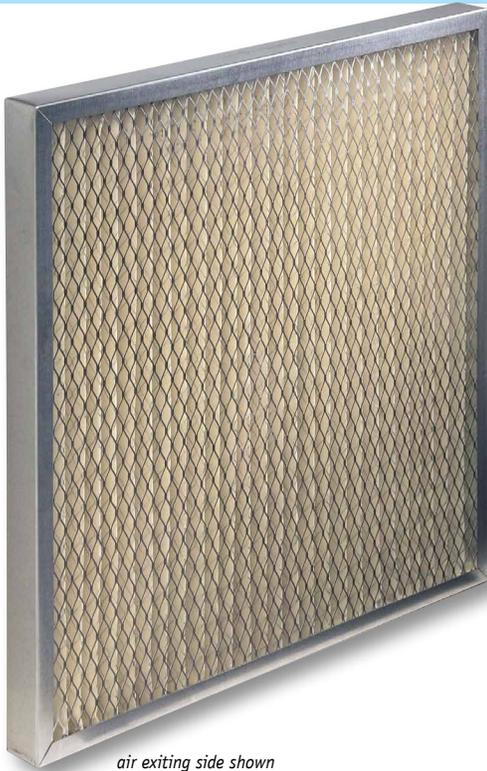

air exiting side shown

Multi-Pleat HT filters are designed for ovens and air filtration systems with continuous operational temperatures up to 500°F (260°C). This product is widely used in applications such as paint spray booths, baking systems, drying ovens, and in any system where elevated operating temperatures require a more specialized type of air filtration.

Durable construction

The Multi-Pleat HT is constructed with a medium efficiency extended surface media element secured in a 24 gauge aluminized steel enclosure frame to resist flaking. The MERV 8 media element is composed of specifically formulated, extended surface glass micro fiber, designed to provide superior performance without degradation in high temperature systems. The media element is bonded to the entire interior surface of the frame to eliminate air bypass, and the radial design of each pleat insures total media utilization. **The media element is supported downstream by a high temperature expanded metal grid.**

Nominal Size	Actual Size	Capacity (CFM) Standard	Capacity (CFM) High	Resistance (inches W.G.)		Media Area (Sq. Ft.)
				300 FPM	500 FPM	
16x20x1	15-1/2 x 19-1/2 x 3/4	650	815	.50		4.8
16x25x1	15-1/2 x 24-1/2 x 3/4	850	1060	.50		6.0
20x20x1	19-1/2 x 19-1/2 x 3/4	850	1060	.50		6.2
20x25x1	19-1/2 x 24-1/2 x 3/4	1050	1315	.50		7.7
24x24x1	23-3/8 x 23-3/8 x 3/4	1200	1500	.50		8.6
12x24x1	11-3/8 x 23-3/8 x 3/4	600	750	.50		4.2
16x20x2	15-1/2 x 19-1/2 x 1-3/4	650	1085	.20	.43	8.3
16x25x2	15-1/2 x 24-1/2 x 1-3/4	850	1420	.20	.43	10.5
20x20x2	19-1/2 x 19-1/2 x 1-3/4	850	1420	.20	.43	11.2
20x25x2	19-1/2 x 24-1/2 x 1-3/4	1050	1755	.20	.43	13.1
24x24x2	23-3/8 x 23-3/8 x 1-3/4	1200	2000	.20	.43	15.0
12x24x2	11-3/8 x 23-3/8 x 1-3/4	600	1000	.20	.43	7.5
16x20x4	15-1/2 x 19-1/2 x 3-5/8	650	1085	.18	.40	15.1
16x25x4	15-1/2 x 24-1/2 x 3-5/8	850	1420	.18	.40	18.9
20x20x4	19-1/2 x 19-1/2 x 3-5/8	850	1420	.18	.40	19.4
20x25x4	19-1/2 x 24-1/2 x 3-5/8	1050	1755	.18	.40	24.2
24x24x4	23-3/8 x 23-3/8 x 3-5/8	1200	2000	.18	.40	27.0
12x24x4	11-3/8 x 23-3/8 x 3-5/8	600	1000	.18	.40	12.9

Corporate Offices

P.O. Box 3186 • 625 West Hill Street (40208)
Louisville, KY 40201 • 502.634.4796
Fax: 502.637.2280 • Email: info@kochfilter.com
www.kochfilter.com

© JULY 2013 KOCH FILTER CORPORATION



Look for the Koch Green icon! Whenever you see the Koch Green icon, we are identifying a product that meets or exceeds our criteria in one or more of the following categories: **Earns LEED Points, Reduces Energy Costs, Extends Filter Lifecycles, Conserves Resources, and Improves Indoor Environmental Quality.**

Koch Filter Corporation...Durable. Reliable. Versatile.

Bulletin No. PB-594